

# Hot Melt Hoses


## Ample Diameter & Length Ranges

### Proven stability.

Because of their new advanced designs, **MELTON** is able to offer a larger range of hot melt hoses with better market standard adaptability. Melton hoses are the ideal solution for better quality hot melt transport with optimal benefits.

#### **MELTON's Hot Melt Hoses Offer:**

- *Compatible*
- Flexibility
- Interchangeability
- Versatility & dependability for all applications
- Proven design & quality guaranteed
- Long lasting design to remain "char" free
- "Nomex" insulation for the best insulation and temperature stability in the industry

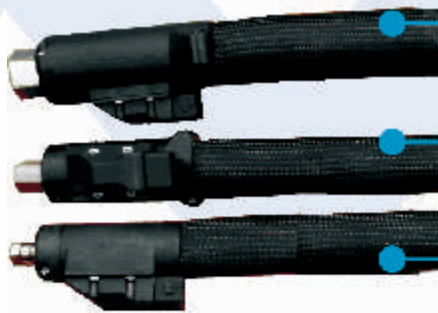

An ample range of diameters and lengths:

- Ø8mm, Ø13mm, Ø16mm, Ø20mm
- Up to 26m length



Spring accessory and corrugated covers improve hose protection



Waterproof option available with specialty fittings and rubber covers for humid environments




HP hoses support high power values and improve mechanical resistance



Electrical connections compatible with market standards

# Hot Melt Hoses

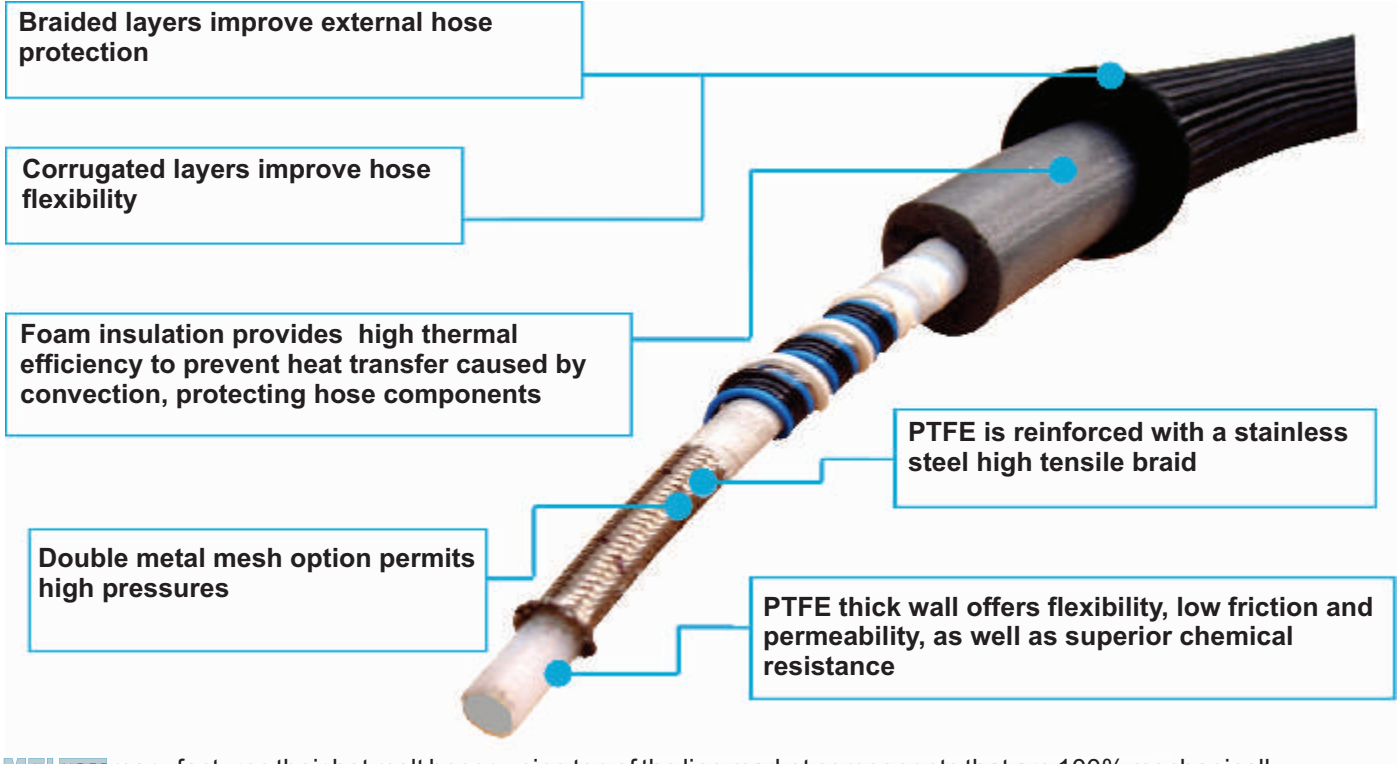

- **MELTON** manufactures their hot melt hoses using top of the line market components that are 100% mechanically and electronically interchangeable.
- **MELTON** Hot Melt Hoses are temperature sensed by Ni-120 or PT-100 Rtd.
- Accessories include brackets, fittings, hose protectors, corrugated and braided covers.
- **MELTON** products are CE certified.

## Technical Characteristics

Characteristics	Hot Melt Hoses			
<b>Maximum Working Temperature:</b>	220°C			
<b>Internal Diameter (mm):</b>	Ø8	Ø13	Ø16	Ø20
<b>Maximum Working Pressure (bar):</b>	100	100	100	80
<b>Power Consumption (W/m):</b>	150	175	195	200
<b>RTD:</b>	PT-100/ NI-120/ NTC 1000/ FEKO			
<b>Minimum Curvature Radius (180°):</b>	160 mm			
<b>Voltage:</b>	200-240 VAC			



For more information visit [www.valcomelton.com](http://www.valcomelton.com), or contact your local representative.  
 World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel: 513.874.6550 • Fax: 513.874.3612 • [info@meltonhotmelt.com](mailto:info@meltonhotmelt.com)  
 European Headquarters: Spain, Navarra • Tel: +34.948.321.580 • Fax: +34 948 326 584 • [melton@melton.es](mailto:melton@melton.es)  
 Asian Headquarters: China, Xiamen, Fujian • Tel: +86.592.591.7854 • Fax: +86.592.591.7834 • [china@valcomelton.com](mailto:china@valcomelton.com)  
[www.valcomelton.com](http://www.valcomelton.com) • Serving Over 52 Countries Worldwide.

