




## FLEXSPRAY™ DUAL SERIES


### Spray Dispensing Applicator with Independent Air Heater

The Valco Melton FlexSpray Dual Series is a cost-effective solution that provides highly accurate adhesive application and reduces initial investment in addition to spare parts inventory. Specially designed for the nonwoven and converting industries, the FlexSpray Dual Series is compatible with SwirlCP and BAT25 Modules and a wide variety of nozzles to cover any pattern requirement.

- New air heating system increases thermal efficiency and process adjustment flexibility.
- Accepts various non-contact dispensing technologies.
- 100% compatible standard components.

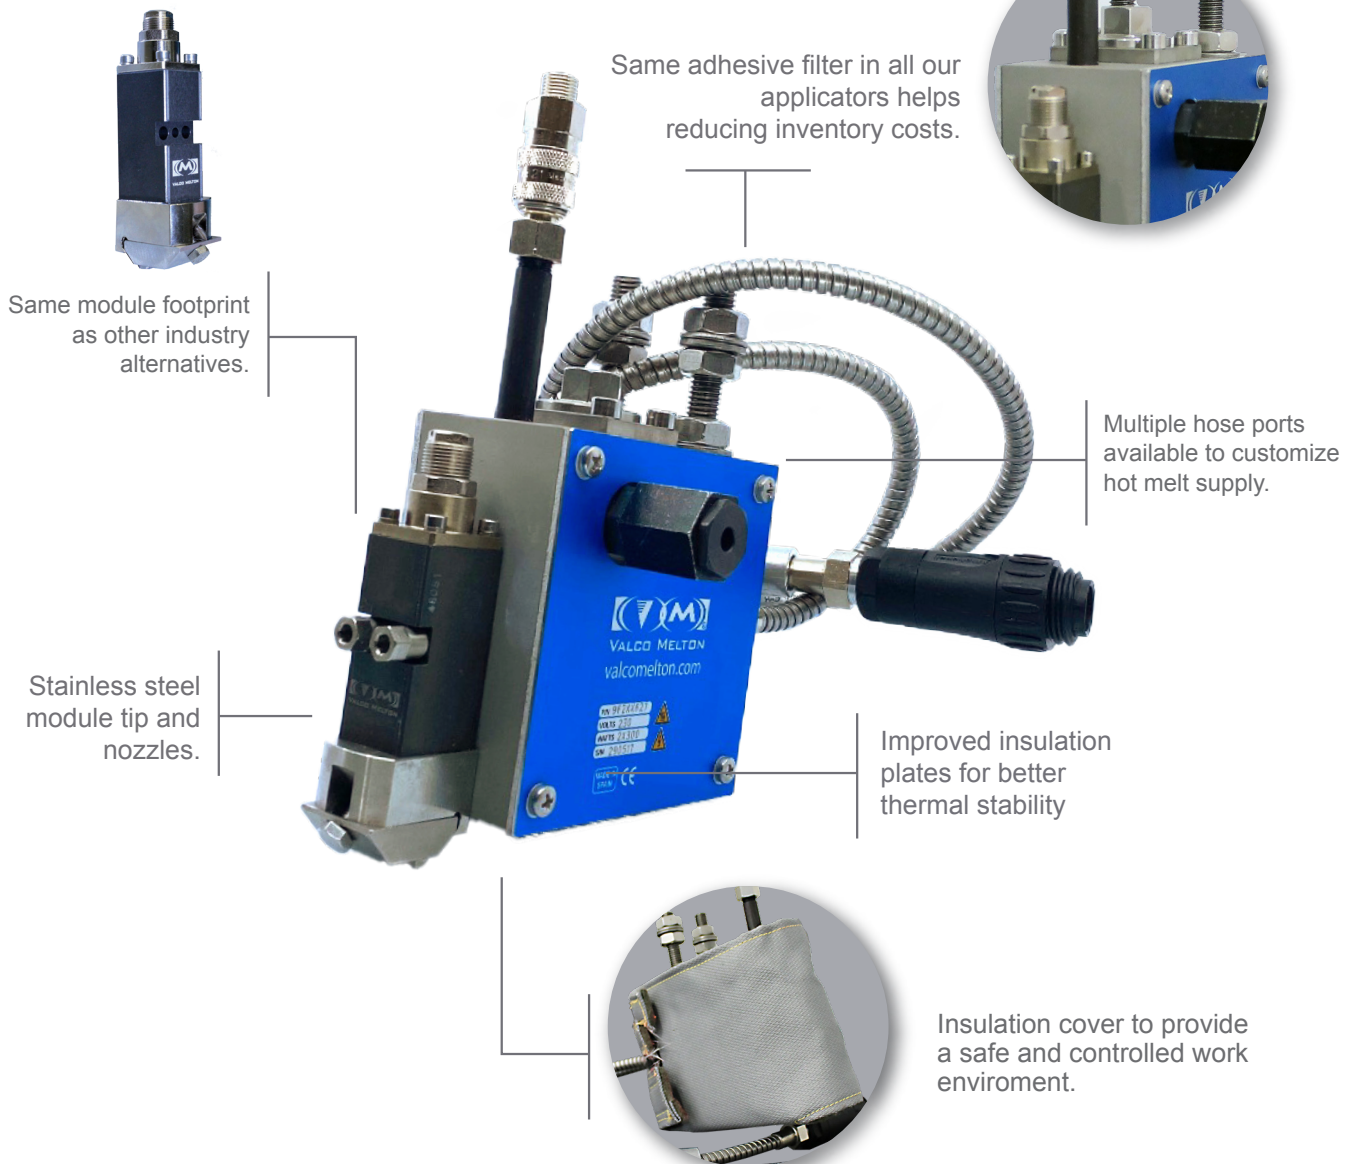


# FLEXSPRAY SERIES WORKS WITH OUR WIDE RANGE OF SPRAYING AND COATING NOZZLES.

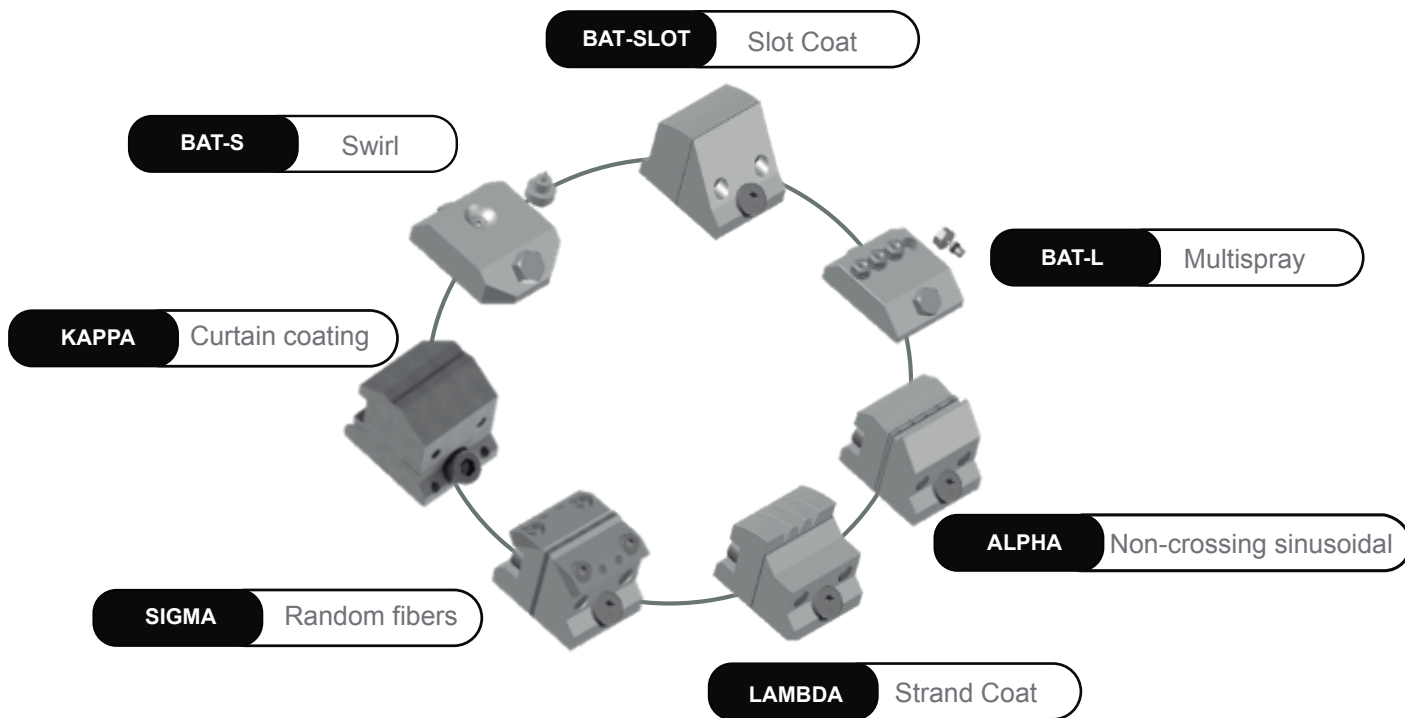

## Technical Specifications

| Specifications                    |                        |
|-----------------------------------|------------------------|
| Max. Operating Temperature        | 240°C / 464°F          |
| Max. Operating Hydraulic Pressure | 100 bar / 1450 psi     |
| Max. Operating Cycle Rate         | 2400 cycles per minute |
| Operating Air Pressure            | 4-6 bar / 58-87 psi    |
| Electrical Consumption            | 190-250 VAC 50/60 Hz   |
| Max Size                          | 1000 mm body length    |
| Max. Spray Air Pressure           | 2.5 bar / 36 psi       |

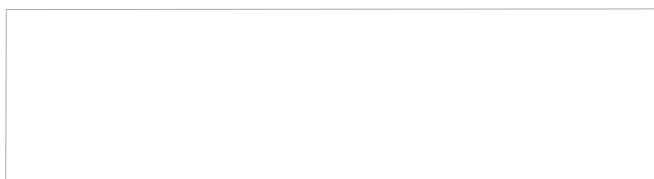

For more information, visit [valcomelton.com](http://valcomelton.com) or contact your local Valco Melton representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612

Europe Headquarters: Spain, Navarra • Tel:+34.948.321.585 • Fax:+34.948.326.584

Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834

inquiry@valcomelton.com • Serving over 76 Countries Worldwide • valcomelton.com