

FLEXSPRAY SERIES APPLICATOR

Spray Dispensing Applicator with Independent Air Heater


The Valco Melton FlexSpray Dual Series is a cost-effective solution that provides highly accurate adhesive application and reduces initial investment in addition to spare parts inventory. Specially designed for the nonwoven and converting industries, the FlexSpray Dual Series is compatible with SwirlCP and BAT25 Modules and a wide variety of nozzles to cover any pattern requirement.



Same adhesive filter in all our applicators helps reducing inventory costs.




Same module footprint as other industry alternatives.

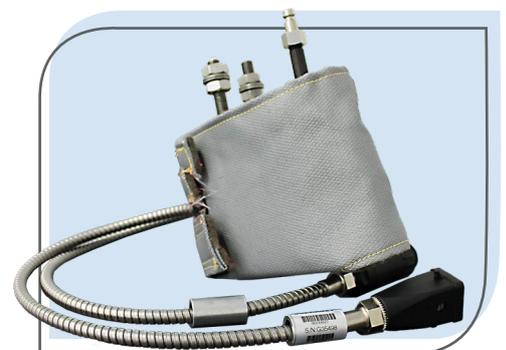

Insulation cover to provide a safe and controlled work environment.

- New air heating system increases thermal efficiency and process adjustment flexibility.
- Accepts various non-contact dispensing technologies.
- 100% compatible standard components.
- Improved insulation plates for better thermal stability
- Stainless steel module tip and nozzles

Wide range of spraying and coating nozzles

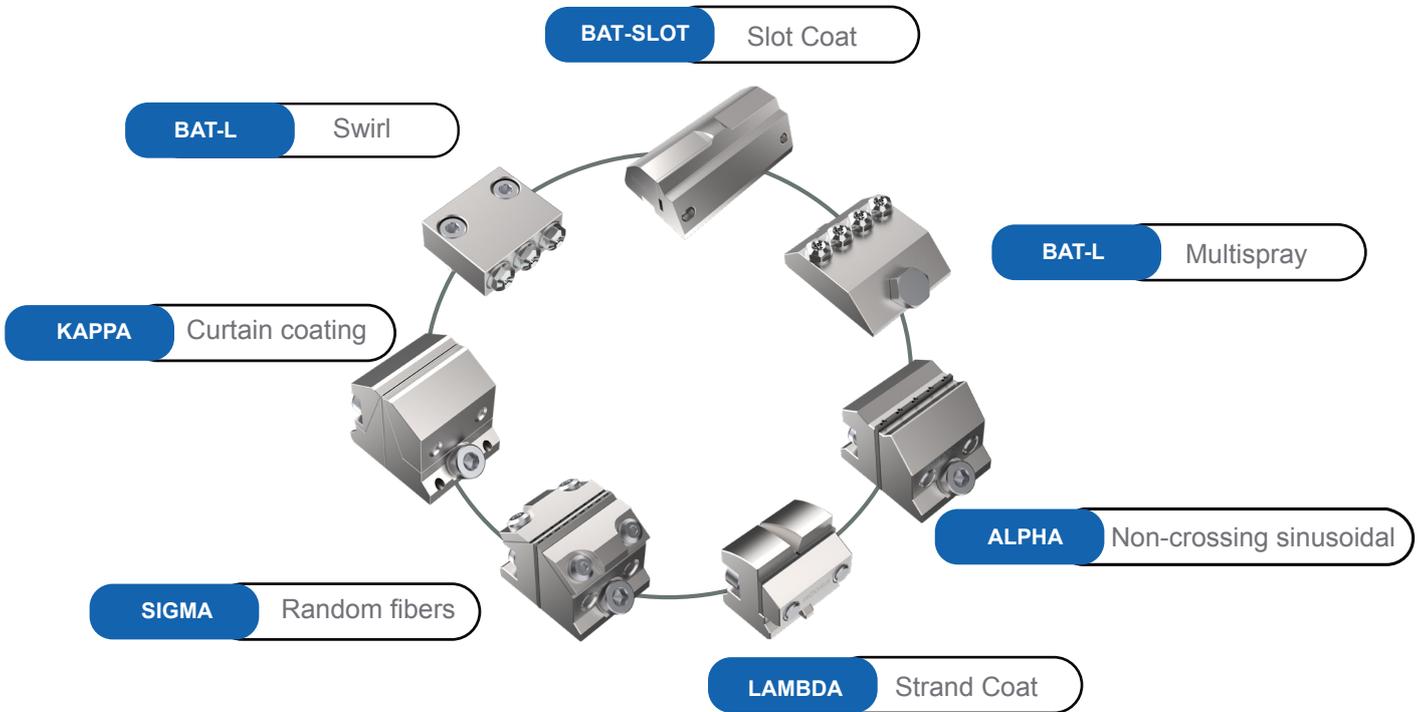

Technical Specifications

Mito Series	
Max. Operating Temperature	240°C / 464° F
Max. Operating Hydraulic Pressure	100 bar / 1450 ps
Operating Air Pressure	4-6 bar /58-87 psi
Max. Operating Cycle Rate	2400 cycles per minute
Electrical Consumption	190-250 VAC 50/60 Hz
Max. Size	1000 mm body length
Max. Spray Air Pressure	2.5 bar / 36 psi

For more information, visit valcomelton.com or contact your local representative
 World Headquarters: Cincinnati, OH, USA • Tel: +1 513 874 6550
 Europe Headquarters: Orkoien, Spain • Tel: +34 948 321 580



Locations

inquiry@valcomelton.com

KCB 000067 EN 004